



# CS-6A /CS-30A /CS-30R

## Horn Loaded Projector Speakers

### Features

- 6W - 30W
- 100V, 70V, 50V operation
- 95 - 101 dB SPL
- ABS


CS-6A, CS-30A and CS-30R are horn loaded projector speakers dedicated to applications in noisy environment. They take the benefit of the directivity performances of horn speakers with the large frequency response of sound projectors.

Made of ABS resin, the speakers are shock resistant and weatherproof. They include a line transformer with the choice of 100V, 70V and 50V operation mode.



### Specifications

| MODEL              | CS-6A   | CS-30A /CS-30R  |
|--------------------|---|---|
| Type               | Square horn loaded (CS-6A)  | Square horn loaded (CS-30A)<br>Round horn loaded (CS-30R)                       |
| Input Power (RMS)  | 6W  | 30W   |
| Input Impedance    | 420 Ohms (50V line only)<br>830 Ohms (50V, 70V line only)<br>1.65k, 3.3k, 6.7k Ohms | 83 Ohms (50V line only)<br>165 Ohms (50V, 70V line only)<br>1.3k, 330, 670 Ohms |
| Preset Impedance   | 1.65k Ohms  | 330 Ohms  |
| Frequency Response | 150 ~ 15kHz   | 125 ~ 15kHz   |
| Transducer         | 12 cm (4.7")  | 12 cm (4.7")  |
| Output Power       | 1.5, 3, 6W  | 7.5, 15, 30W  |
| SPL (1W/1m)        | 95dB  | 101dB   |
| Material           | ABS   | ABS   |
| Weight             | 1.4 kg (3.09 lbs.)  | 3.7 kg (8.16 lbs.) (CS-30A)<br>2.1kg (4.62 lbs) (CS-30R)                        |

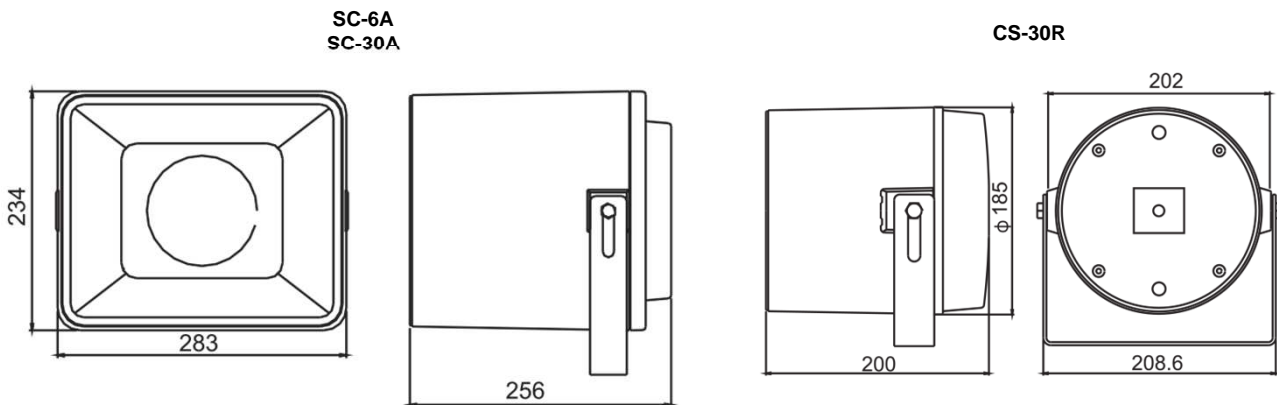

Specifications subject to modification without notice