



# CSL-810T / CSL-810TF

## Ceiling Speakers

### Features

- 10W
- 8" transducer
- 70, 100V operation
- 98 dB SPL




The CSL-810T and CSL-810TF are ceiling speakers dedicated to public address for high quality foreground or background music. Designed for installations where space is limited in solid or tile ceilings, both speakers have a shallow depth. CSL-810TF is 85 mm including the protection dome. The basic model without dome CSL-810T is only 71.5 mm.



### Specifications

MODEL	CSL-810T	CSL-810TF
Type	100, 70V	100, 70V
Transducer	8" (8 Ohms)	8" (8 Ohms)
Rated Input Power	10W	10W
Transformer Tap	2.5, 5, 10W	2.5, 5, 10W
Input Impedance (100V)	1k, 2k, 4k Ohms	1k, 2k, 4k Ohms
Input Impedance (70V)	490, 1k, 2k Ohms	490, 1k, 2k Ohms
Frequency Response	100 Hz ~ 20 kHz	100 Hz ~ 20 kHz
SPL (1W/1m)	98 dB	98 dB
Material	Metal frame, metal grille	Metal frame, metal grille
Protection	N/A	Aluminum dome
Dimensions (Diam. x L)	265 x 71.5 mm (10.43" x 2.81")	265 x 85 mm (10.43" x 3.34") inc. aluminum dome
Weight (Without dome)	1.2 kg (2.64 lbs.)	1.2 kg (2.64 lbs.) without dome

*Specifications subject to modification without notice*

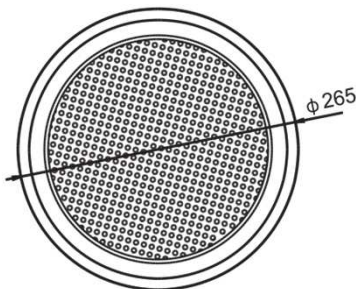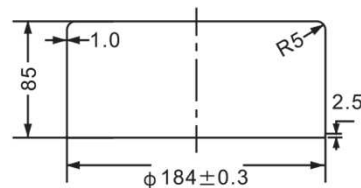

## SEIKAKU TECHNICAL GROUP LIMITED

NO.1 LANE 17, SEC.2, HAN SHI WEST ROAD, TAICHUNG 40151 TAIWAN

Tel: +886-4-22313737 Fax: +886-4-22346757 www.seikaku.hk