




VAS-3600SA

Voice Alarm System
Standby Power Amplifier

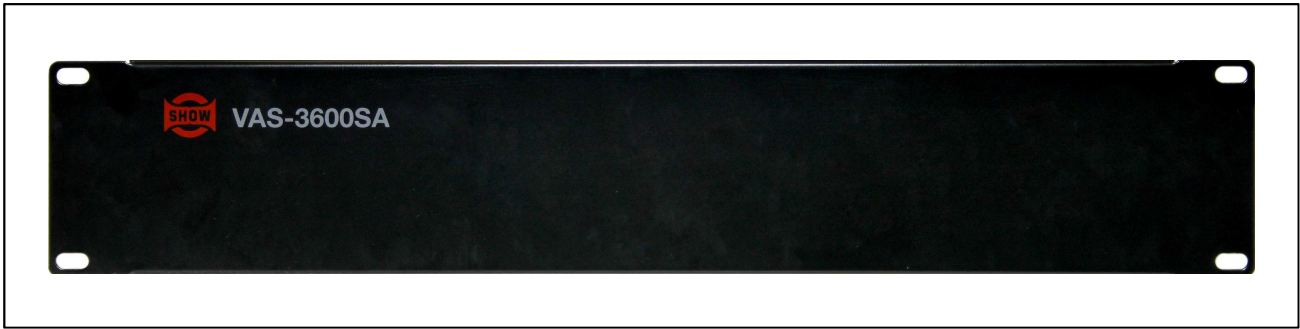

Features

- AC & DC power inputs
- Amplifier input from the host
- Amplifier output to the host

VAS-3600SA is a standby power amplifier unit for the Voice Alarm System (VAS). It delivers the correct amplification to the host in case of failure of the main amplifier.


In addition to VAS-3600SA, the Voice Alarm System includes the following devices:

- VAS-3606 : Host Amplifier
- VAS-3600EX: Standby Amplifier
- VAS-64RFM: Fireman Microphone Station
- VAS-64RPM: Paging Microphone Station
- VAS-64EX: Expander Station
- VAS-100BGM: MP3 Player with Timer
- VAS-100EOL : Speaker Line Detection Module
- VAS-100DS: Backup Power Supply
- VAS-1000NET: Network Manager
- VAS-100BGM: FM/MP3 Player with Timer
- VAS-100RVC: Remote Zone Volume Control

Specifications

MODEL	VAS-3606
Power Supply	AC 115V / 230 50Hz / 60Hz : DC 24V
Power Output (1kHz / 70V / 100V)	360W
Inputs	1 INPUT
Outputs	1 OUTPUT
Frequency Response	20Hz ~ 20 kHz
Input Sensitivity (1kHz)	0dBv

Specifications subject to modification without notice

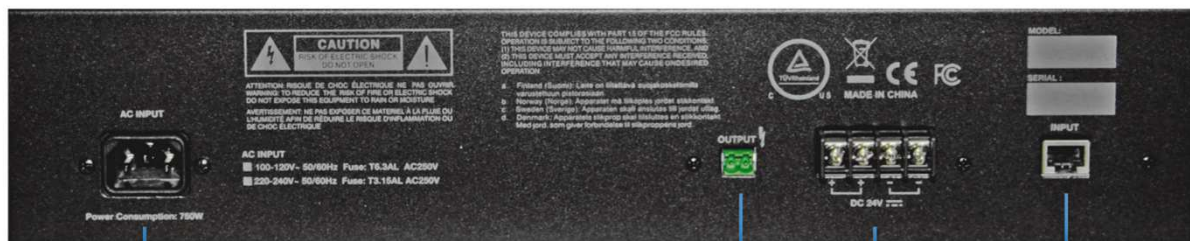

1. AC power input
2. Standby power amplifier output
3. DC power input
4. Standby power amplifier input, can be connected to three main amplifiers.

Functions



1. AC power input
2. Standby power amplifier output
3. DC power input
4. Standby power amplifier input, can be connected to three main amplifier.