Office

DA-241F

P.A. AMPLIFIER

DA-241F · PC INTERFACE

CM-800

CSB-10

NCL-4

Stock

NCL-6

Fitting Rooms

NWB-8

Sales Floor

CM-800

Sales Counter

Simple installation

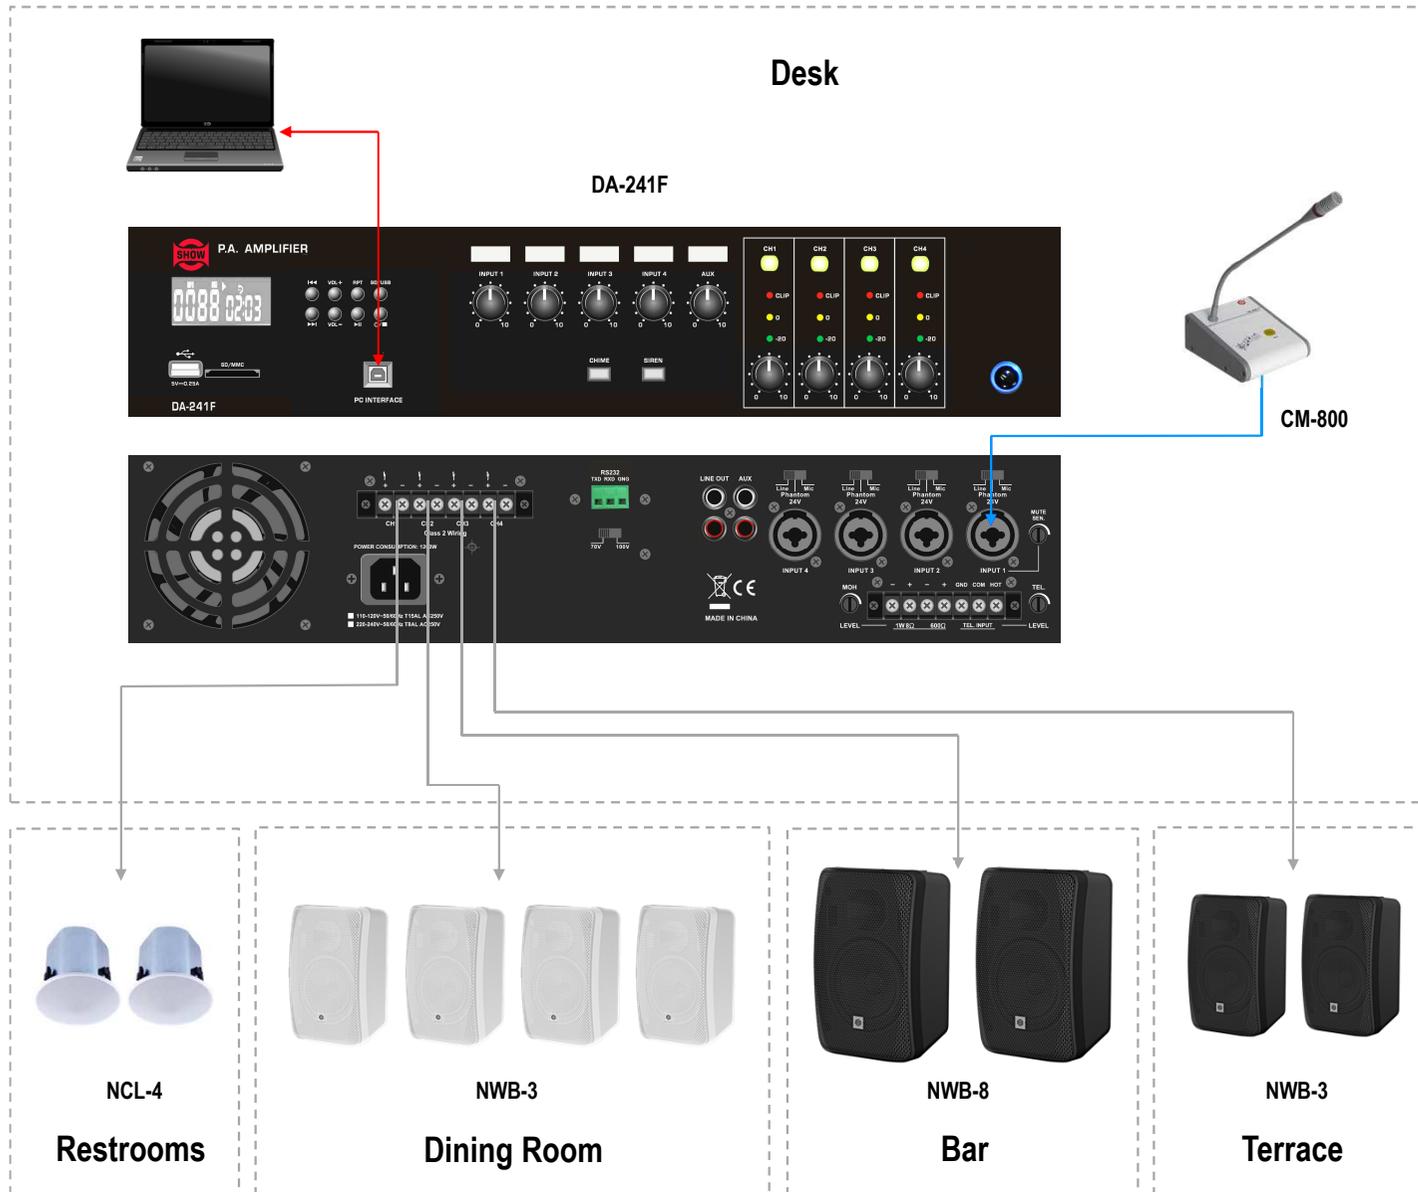This application is very easy to set up and it is suitable for many retail store configurations.

Thanks to the 240 W built-in Class-D amplifier, there is no need for additional devices except speakers and mics.

The 4 zone volumes are individually adjusted from the office, using knobs on the front panel device or controls on the PC Editor, each zone having its own EQ settings.

The routing setting is equivalent to a 6 x 4 matrix, so sources selected from built-in MP3 (DA-241F), Line In, Aux In or Dante optional card, can be routed to any output with easy control action from PC. So, different programs can be broadcast in different zones if necessary.

Two paging microphones with priority levels are used for message broadcast in any zone.

By connecting a small speaker to the 1W output it is possible to monitor all sound sources.
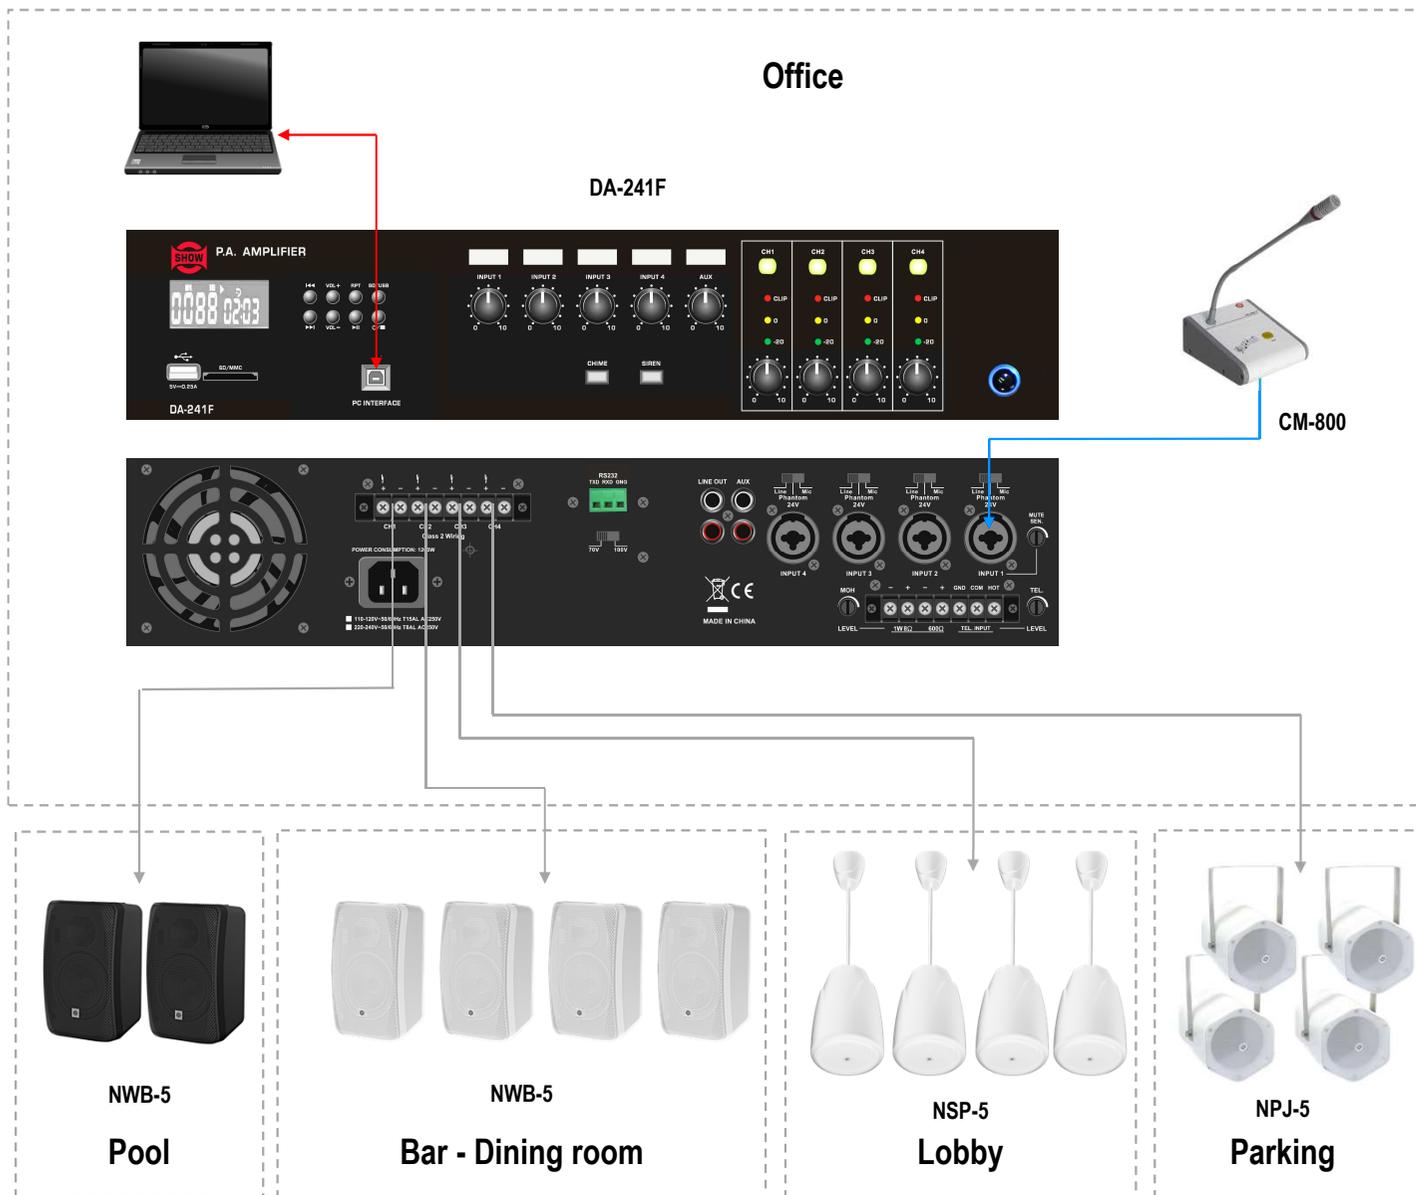
Desk

DA-241F

SHOW P.A. AMPLIFIER

CH1 CH2 CH3 CH4
CLIP CLIP CLIP CLIP

INPUT 1 INPUT 2 INPUT 3 INPUT 4 AUX

CHIME SIREN

DA-241F
PC INTERFACE

CM-800

RS232
TXD RXD GND

LINE OUT AUX

Line Mic Line Mic Line Mic Line Mic
Phantom Phantom Phantom Phantom
24V 24V 24V 24V

MUTE SEN.

INPUT 4 INPUT 3 INPUT 2 INPUT 1

MOH GND COM HOT TEL.

MADE IN CHINA

LEVEL 1W 8Ω 600Ω TEL. INPUT LEVEL

NCL-4

Restrooms

NWB-3

Dining Room

NWB-8

Bar

NWB-3

Terrace

Simple installation

This application is very easy to set up and it is suitable for many restaurant / bar configurations.

Thanks to the 240 W built-in Class-D amplifier, there is no need for additional devices except speakers and one mic. The 4 zone volumes are individually adjusted using knobs on the front panel device or controls on the PC Editor, each zone having its own EQ settings.

The routing setting is equivalent to a 6 x 4 matrix, so sources selected from built-in MP3 (DA-241F), Line In, Aux In or Dante optional card, can be routed to any output with easy control action from PC. So, different programs can be broadcast in different zones.

The microphone is used for message paging in any zone.

Office

DA-241F

P.A. AMPLIFIER

CM-800

NWB-5

Pool

NWB-5

Bar - Dining room

NSP-5

Lobby

NPJ-5

Parking

Simple installation

This application is very easy to set up and it is suitable for many hotel configurations.

Thanks to the 240 W built-in Class-D amplifier, there is no need for additional devices except speakers and one mic. The 4 zone volumes are individually adjusted using knobs on the front panel device or controls on the PC Editor, each zone having its own EQ settings.

The routing setting is equivalent to a 6 x 4 matrix, so sources selected from built-in MP3 (DA-241F), Line In, Aux In or Dante optional card, can be routed to any output with easy control action from PC. So, different programs can be broadcast in different zones.

The microphone is used for message paging in any zone.