


PS-2406/4806

Office Building - Application Guide

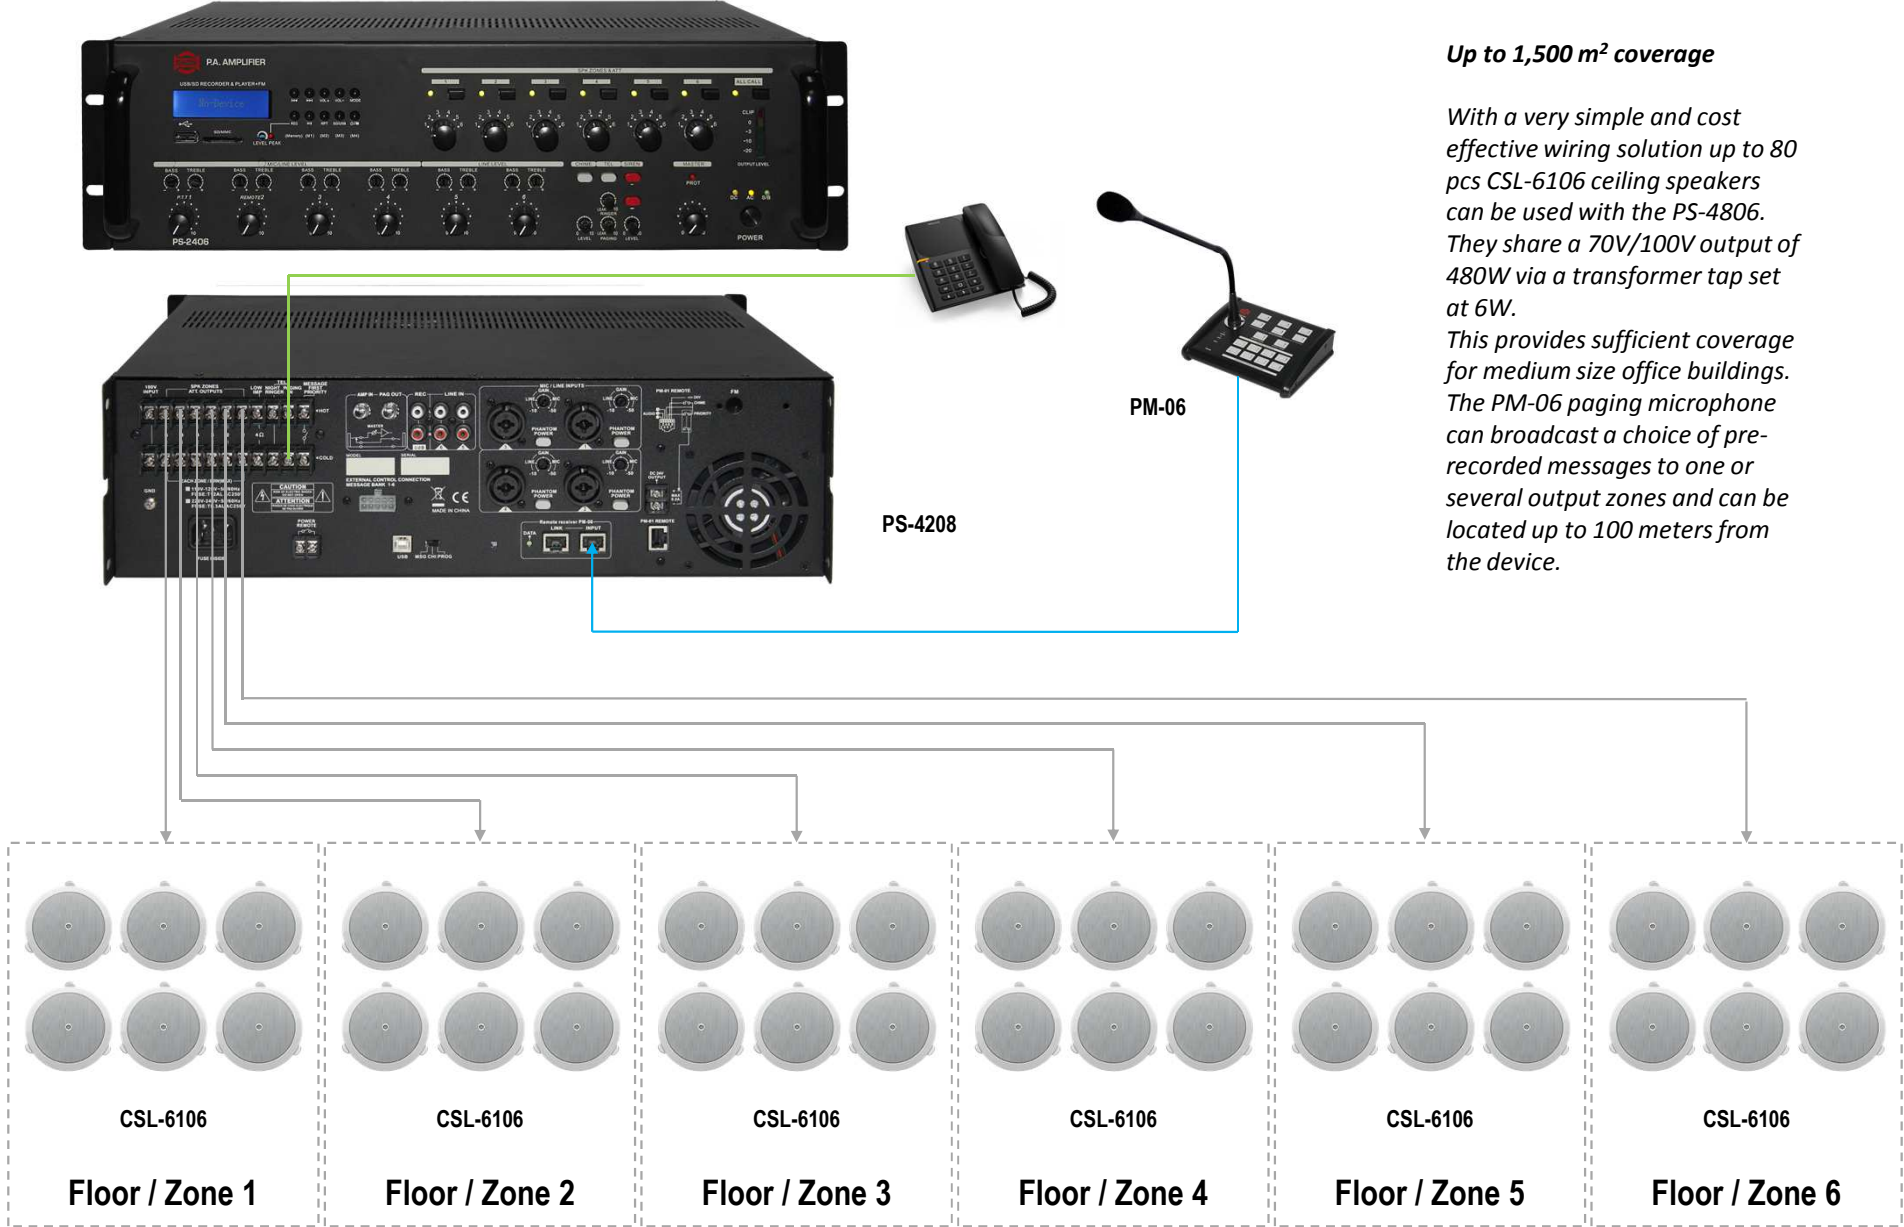

Up to 1,500 m² coverage

With a very simple and cost effective wiring solution up to 80 pcs CSL-6106 ceiling speakers can be used with the PS-4806. They share a 70V/100V output of 480W via a transformer tap set at 6W. This provides sufficient coverage for medium size office buildings. The PM-06 paging microphone can broadcast a choice of pre-recorded messages to one or several output zones and can be located up to 100 meters from the device.