



HM-38 / HS-02U

Headset Microphones

Features

- Condenser capsule
- Mini Jack (L) connector
- Mini XLR (4B) connector
- Light and robust



HM-38 and HS-02U are condenser headset microphones dedicated to wireless applications. They can be used with different pocket transmitter models thanks to various connectors and cabling options.

Specifications

MODEL	HM-38	HS-02U
Transducer Type	Condenser	Condenser
Frequency Response	80Hz ~ 12kHz	20Hz ~ 20kHz
Sensitivity	-68dB +/-3dB at 1kHz	-42dB +/-3dB at 1kHz
Preset Impedance	600 Ohms	
Connector Type	Jack 3.5mm (L) Mini XLR 4 (4B)	Jack 3.5mm (L) Mini XLR 4 (4B)
Directivity		Uni-directional
Weight	18g	52g

Specifications subject to modification without notice



L-TYPE JACK



4B MINI XLR

Pocket Transmitters Cabling

UP-8P / UB-8P Series

1. GND
2. VCC
3. GT
4. Condenser / Dynamic Mic.



VT-22P / UT-86P Series

1. GND
2. VCC
3. GT
4. Condenser / Dynamic Mic.

HM-38

HS-02U

X:1.0000kHz *Y:-64.13dB ZA:2.0000 SSR Fund.

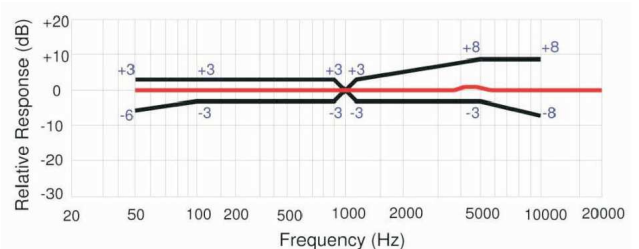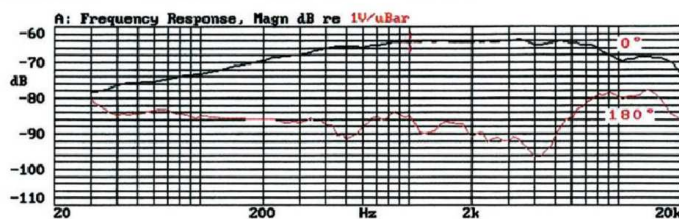

SEIKAKU TECHNICAL GROUP LIMITED

NO.1 LANE 17, SEC.2, HAN SHI WEST ROAD, TAICHUNG 40151 TAIWAN

Tel: +886-4-22313737 Fax: +886-4-22346757 www.seikaku.hk

2019 V.1