



CS-212 / CS-212WP


Column Speakers

Features

- 12W
- 25V - 70V - 100V
- 4 x 2.5" full-range transducers



CS-212 and CS-212WP columns are the perfect solution for highly reverberant environment such as churches, architectural spaces, auditoriums, railway stations and other transport terminals. Based on the line array principle, the columns provide a consistent pattern control for a superior sound quality.

CS columns are made of metal and are dedicated for outdoor (WP model) or indoor fixed installations. They are equipped with 4 units of 2.5" full-range transducers and can operate with 25V, 70V or 100V line.

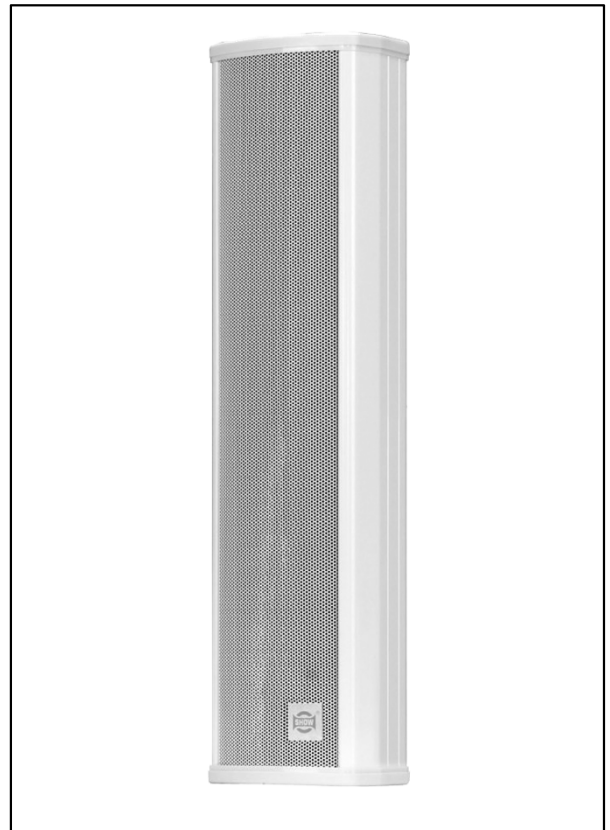

Specifications

MODEL	CS-212 / CS-212WP
Transducer	4 x 2.5" full-range
Input power	Rated 12W / Max. 24W
Output power	1.5W / 3W / 6W / 12W
Input Impedance	(100V): 6.6k Ω / 3.3k Ω / 1.66k Ω / 833 Ω (70V): 3.26k Ω / 1.63k Ω / 816 Ω / 408 Ω (25V): 416 Ω / 208 Ω / 104 Ω / 52 Ω
Input voltage	25V / 70V / 100
Max SPL (1W / 1m)	94 dB
Frequency Response (-6dB)	250Hz-16kHz
Dimension (W x L x H)	106 x 405 x 75 mm
Weight	2.2kg (4.85lbs)

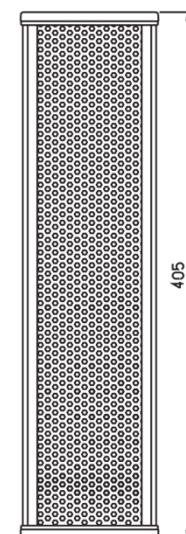

Specifications subject to modification without notice

SEIKAKU TECHNICAL GROUP LIMITED

NO.1 LANE 17, SEC.2, HAN SHI WEST ROAD, TAICHUNG 40151 TAIWAN

Tel: +886-4-22313737 Fax: +886-4-22346757 www.seikaku.hk

2018 V.1