



CSB-50 / CSB-150 / CSB-175

P.A. Speakers

Features

- 40 W - 60 W - 90 W
- Passive two-way
- 8Ω - 70V/100V


CSB-50, CSB-150 and CSB-175 are the perfect speakers for background music applications. With extended frequency response and high dynamics they offer a coherent sound reproduction at any level. From 40W to 90W, CSB speakers feature 8Ω version as well as 70/100V transformer. The system includes a U bracket to allow for easy permanent installation in a wide range of places. Optional adaptors offer complementary solutions for installations on speaker stands or on walls and ceilings.



Specifications

MODEL	CSB-50 / 50CV	CSB-150 / 150CV	CSB-175 / 175CV
Outputs	8Ω - 70V/100V (CV models)	8Ω - 70V/100V (CV models)	8Ω - 70V/100V (CV models)
Power capacity	30W	60W	90W
Selectable Power (CV version)	70V: 3.7W, 7.5W, 15W, 30W, PASS 100V: 7.5W, 15W, 30W, PASS	70V: 7.5W, 15W, 30W, 60W, PASS 100V: 15W, 30W, 60W, PASS	70V: 15W, 30W, 60W, 90W, PASS 100V: 30W, 60W, 90W, PASS
Transducers	4" polypropylene woofer 1" titanium dome tweeter	6.5" polypropylene woofer 1" titanium dome tweeter	8" polypropylene woofer 1" titanium dome tweeter
Crossover Frequency	2.5kHz - 3.5kHz	2.5kHz - 3.5kHz	2.5kHz - 3.5kHz
Sensitivity (1W/1m)	86dB	88dB	90dB
Frequency Response (-6dB)	80Hz-20kHz	50Hz-20kHz	55Hz-18kHz
Connectors	Spring terminals Accepts banana plug	Spring terminals Accepts banana plug	Spring terminals Accepts banana plug
Dimension (H x W x D)	220 x 165 x 150 mm (8.7" x 6.5" x 5.9")	300 x 220 x 200 mm (11.8" x 8.7" x 7.9")	380 x 280 x 220 mm (15" x 11" x 8.7")
Weight (Approx.)	2.2kg / 2.7kg	3.5kg / 4.9kg	5.0kg / 6.2kg

Specifications subject to modification without notice

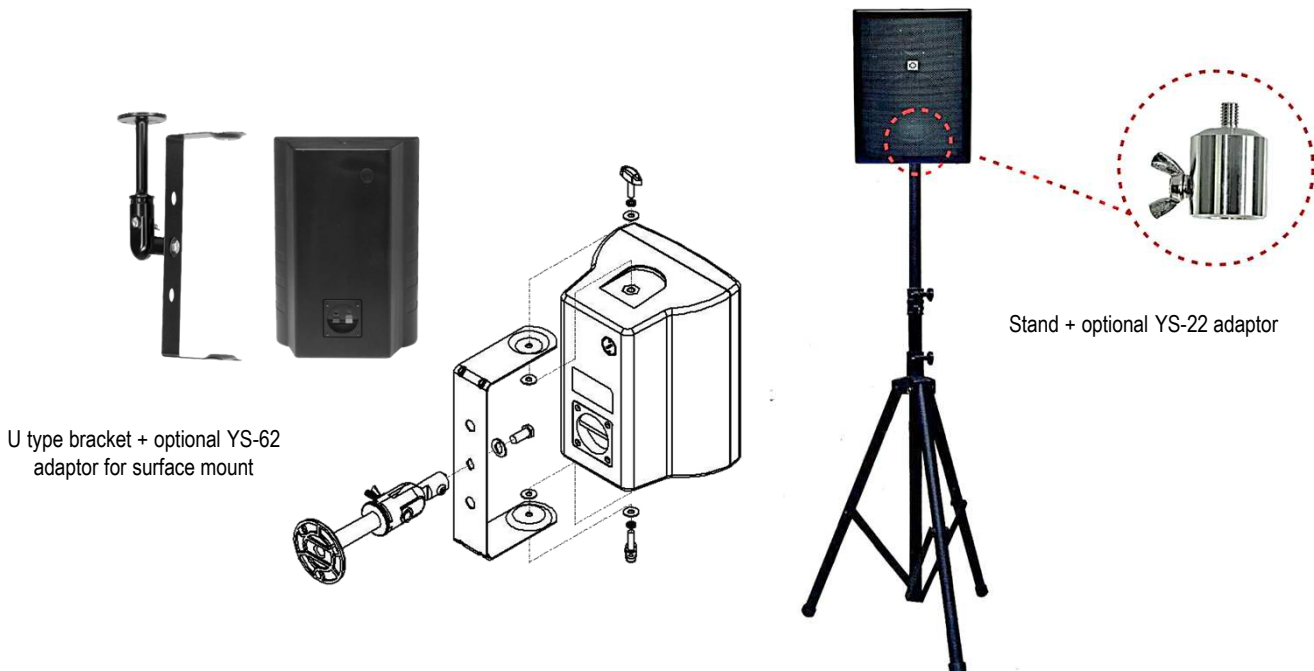

SEIKAKU TECHNICAL GROUP LIMITED

NO.1 LANE 17, SEC.2, HAN SHI WEST ROAD, TAICHUNG 40151 TAIWAN

Tel: +886-4-22313737 Fax: +886-4-22346757 www.seikaku.hk

2018 V.1